

Clips & Fixings

Clips



Commercial Range
Tile Clip/Eave Clip



Natural Range
S/S Verge Clip



Grampian/Highland
S/S Verge Clip



Double Roman/Pennine
S/S Verge Clip



S/S Hip Clip



Natural Range
Tile Clip/Eave Clip


Product	Aluminium Alloy Nail Size	Tile Clip	Verge Clip	Eave Filler
Double Roman	40mm x 3.35mm	Commercial	D.Rom/Pennine	Yes
Grampian	50mm x 3.35mm	Commercial	Gramp/High	-
Highland	50mm x 3.35mm	Commercial	Gramp/High	-
Pennine	40mm x 3.35mm	Commercial	D.Rom/Pennine	Yes
Bute	40mm x 3.35mm	Natural	Natural	-
Galloway	40mm x 3.35mm	Natural	Natural	-
Lothian	40mm x 3.35mm	Natural	Natural	-
Moray	40mm x 3.35mm	Natural	Natural	-
Polden	40mm x 3.35mm	Natural	Natural	-
Plain Tile	38mm x 2.65mm	-	-	-
Natural Range Tile Clip	65mm x 3.35mm	-	-	-
Commercial Range Tile Clip	65mm x 3.35mm	-	-	-

Notes

- In some cases the fixing specification may require the use of anular ring shank or stainless steel nails
- Fixing Specifications are available at www.russellrooftiles.co.uk/fixing-specification

Clips & Fixings


Natural Range Tile Clip

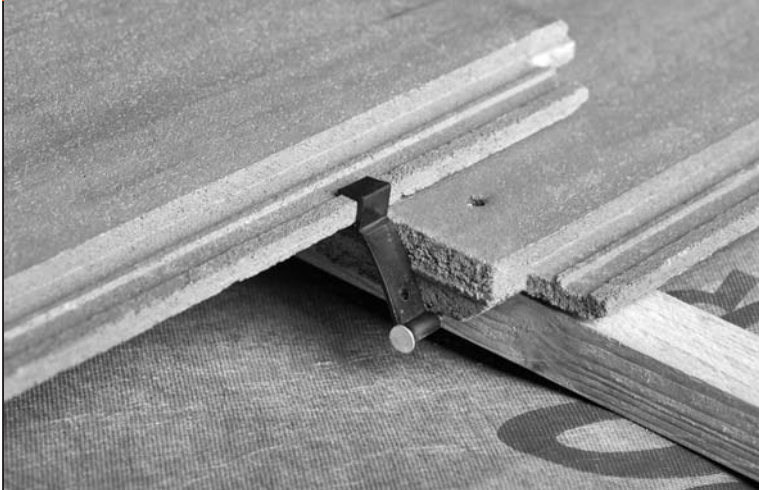

The **Natural Range Tile Clip** is clipped onto the interlock of the tile and then fixed into the batten below using a 65mm x 3.35mm aluminum clout nail (not supplied).

Commercial Range Tile Clip

The **Commercial Range Tile Clip** is clipped onto the interlock of the tile and then fixed into the batten below using a 65mm x 3.35mm aluminum clout nail (not supplied).

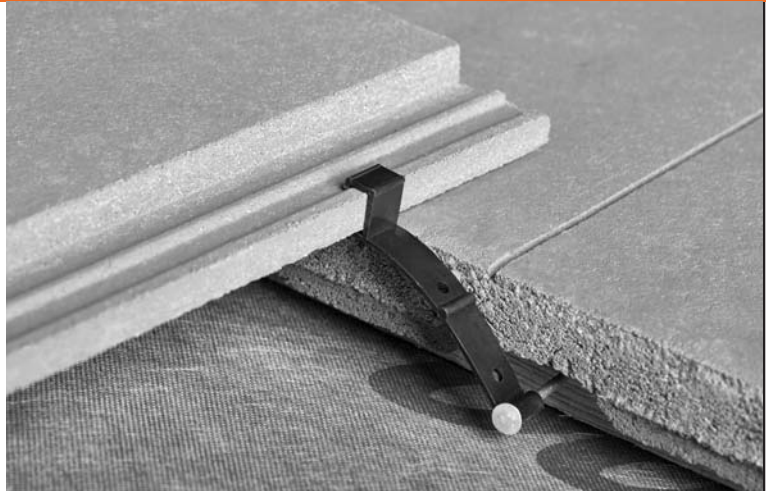

Using Tile Clips at the eaves



At the eaves the tile clips can be cut short and clout nail fixed through the hole in the face of the clip arm, ensuring that there is a minimum 20mm of penetration into the timber fascia board.